


# TECHNICAL SHEET INVISACTA IN230

Concealed hinge for flush doors

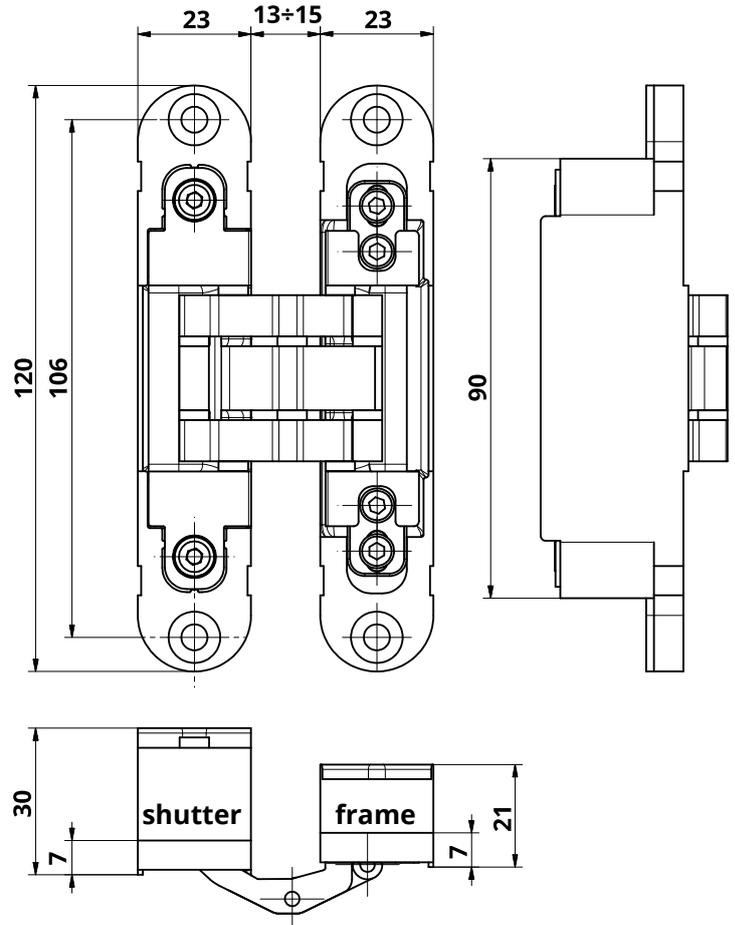

## Technical features

- The hinge is suitable to be installed on doors and frames in wood and aluminium.
- The hinge can be fitted with door closing devices.
- CE certified - European Assessment Document 020001-01-0405
- Fireproof certified 30' - UNI-EN 1634-2
- Material of hinge: ZAMAK.
- Aluminum caps available to conceal the screws.
- The hinge can be fitted right and left.
- Movement on 7 junction fulcrums equipped with bearing in plastic HT with high resistance and long life.
- Equipped with 3-way adjustments that can be settled by means of just one 3 mm hex-spanner.
- Compatible with millings of IN235 and IN232 hinges.

## Technical data

Capacity*	60 Kg.
Hinge height	120 mm
width shutter side	23 mm
width frame side	23 mm
Depth shutter side	30 mm
Depth frame side	21 mm
Door opening angle	180°
Side adjustment	± 1 mm
Height adjustment	± 2 mm
Depth adjustment	± 1 mm

\* Tested with 90x210 cm doors - For more information on the number of hinges to be used according to the weight and dimension of the door, please see the loading charts available on the website [www.otlav.it](http://www.otlav.it).

## Accessories

Aluminium jig	MU230120G002
Nylon jig	MUINV500G004
Door alignment device	AI230120
Caps GC230010	Same finishing than hinges
Fixing plate	NP120040H504

## Finishing

The entered images are only on illustrative purpose.  
Features and colours may differ from what represented.  
Other finishing on demand.

### IN2301209N02

Matt Black plastified



### IN230120V702

Satinized silver plated



### IN230120H004

Zinc plated



### IN230120VN02

Satinized Nickel Plated



### IN230120B002

Bronze plated



### IN2301209P02

White matt RAL9016




### IN230120V002

Polished gold




## Milling on the shutter

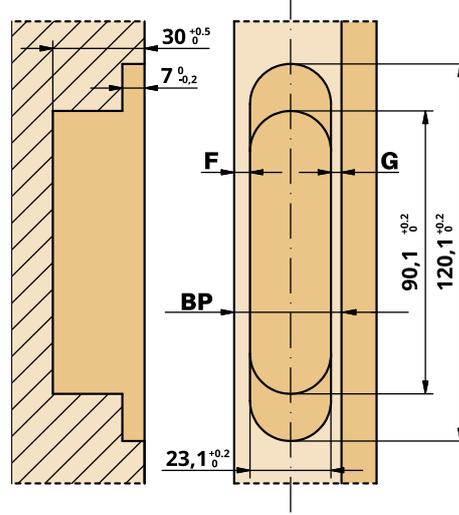

BP	F	G
30	4	3
31	4	4
32	4	5
33	4	6
34	4	7
35	4	8
36	4	9
37	4	10
38	4	11
39	4	12
40	4	13

## Milling on the frame

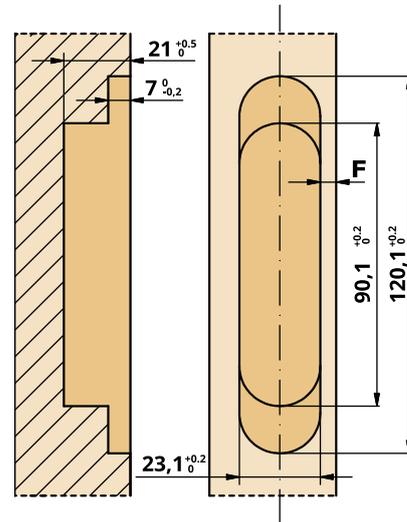

## Caps

